

PDA0730



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

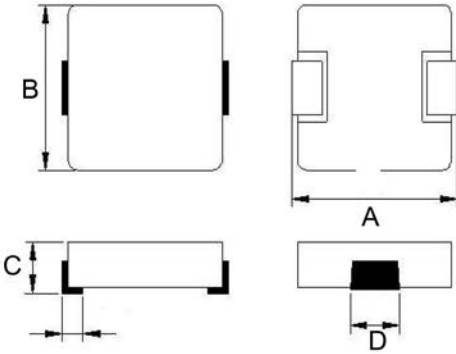

Item	Spec.(mm)	Typ.
A	7.0 ± 0.3	
B	6.6 ± 0.3	
C	3.5 ± 0.3	
D	3.0 ± 0.3	

PDA0730 Series (Quantity: 1500pcs/reel)

Part Number	L0 Inductance (μH) ±20%	Heat Rating Current DC Amps.IDC(A)	Saturation Current Part Number DC Amps. Isat (A)	DCR MΩ TYPICAL 25 ° C	DCR mΩ MAX 25 ° C
PDA0730-R20M-C/B	0.2	24.0	41.0	2.0	3.0
PPD0730-R33M-C/B	0.33	20.0	30.0	2.1	3.4
PDA0730-R47M-C/B	0.47	17.5	26.0	4.0	5.3
PDA0730-R82M-C/B	0.82	13.0	24.0	4.9	7.8
PDA0730-1R0M-C/B	1.0	12.0	22.0	7.4	9.4
PDA0730-1R5M-C/B	1.5	10.0	18.0	9.6	14.0
PDA0730-2R2M-C/B	2.2	8.0	15.0	12.5	18.0
PDA0730-3R3M-C/B	3.3	6.0	11.5	17.5	25.0
PDA0730-4R7M-C/B	4.7	5.5	10.0	31.0	45.0
PDA0730-5R6M-C/B	5.6	5.0	8.5	39.0	52.0
PDA0730-6R8M-C/B	6.8	4.5	8.0	45.0	60.0
PDA0730-8R2M-C/B	8.2	4.0	6.5	48.0	65.0
PDA0730-100M-C/B	10.0	3.5	5.5	62.0	72.0

The sample parameters are based on actual measured values