

PDA1040



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

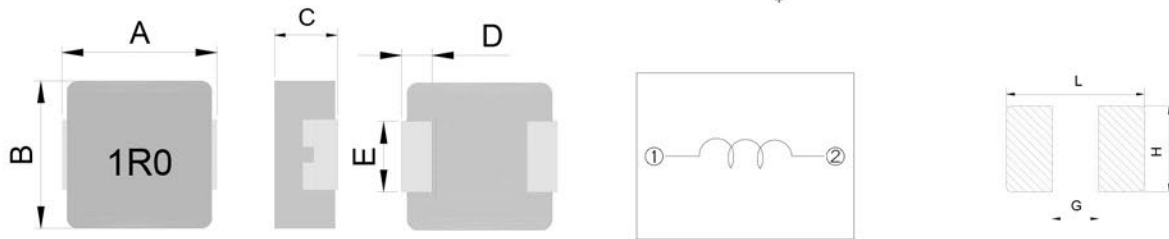

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
PDA1040	9.5±0.3	8.5±0.3	2.8±0.2	1.4±0.3	4.7±0.30

L(mm)	G(mm)	H(mm)
10.4	4.5	5.2

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 mΩ	Rated Current(Max) 額定電流(A)max.
PDA1040-R22	R22	0.22μH±20%	1.30	32.0
PDA1040-R36	R36	0.36μH±20%	1.40	31.5
PDA1040-R39	R39	0.39μH±20%	1.60	30.1
PDA1040-R56	R56	0.56μH±20%	1.80	27.5
PDA1040-1R0	1R0	1.0 μH±20%	4.10	17.5
PDA1040-1R5	1R5	1.5 μH±20%	5.80	15.0
PDA1040-2R2	2R2	2.2μH±20%	9.00	12.0
PDA1040-3R3	3R3	3.3μH±20%	11.80	10.0
PDA1040-4R7	4R7	4.7μH±20%	16.50	9.50
PDA1040-6R8	6R8	6.8μH±20%	19.30	9.00
PDA1040-8R2	8R2	8.2 μH±20%	23.30	8.00
PDA1040-100	100	10.0μH±20%	36.50	6.80

PDA1040 Series (Quantity: 1000pcs/reel)