

PRH10D25



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

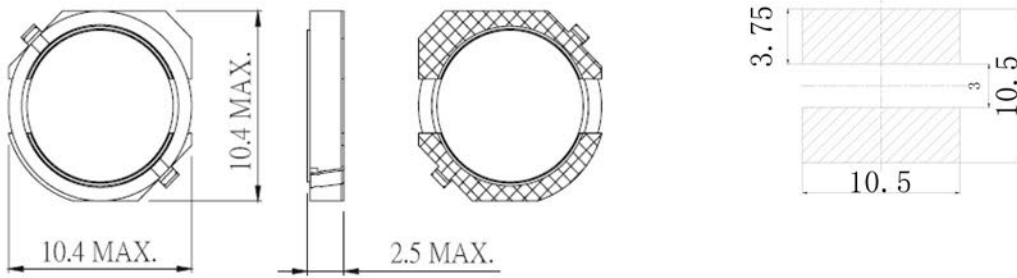

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (mΩ)	Rated Current(Max) 額定電流 (A)
PRH10D 25-3R3	3R3	3.3±25%	46(35.5m)	5.0
PRH10D 25-4R7	4R7	4.7±25%	49(42.4m)	4.4
PRH10D 25-6R8	6R8	6.8±25%	56(48.1m)	3.5
PRH10D 25-100	100	10±25%	85(64.8m)	3.0
PRH10D 25-120	120	12±25%	116(81.8m)	2.8
PRH10D 25-150	150	15±25%	123(102.4m)	2.6
PRH10D 25-180	180	18±25%	143(104.3m)	2.2
PRH10D 25-220	220	22±25%	180(139.5m)	2.0
PRH10D 25-270	270	27±25%	204(154.9m)	1.8
PRH10D 25-330	330	33±25%	263(208.7m)	1.6
PRH10D 25-470	470	47±25%	360(279.4m)	1.4
PRH10D 25-560	560	56±25%	452(347.5m)	1.35
PRH10D 25-680	680	68±25%	509(407.6m)	1.2

* SPQ:1000PCS/REEL