

# PRH124



## FEATURES 特点

- \* Excellent solderability and high heat resistance  
良好的可焊性和高耐热性


## APPLICATION 用途

- \* DC / DC 转换器

## MEASURING FREQUENCY 测试频率

- \* 100KHz 0.3V

## Shapes And Dimensions 外形及尺寸示意图

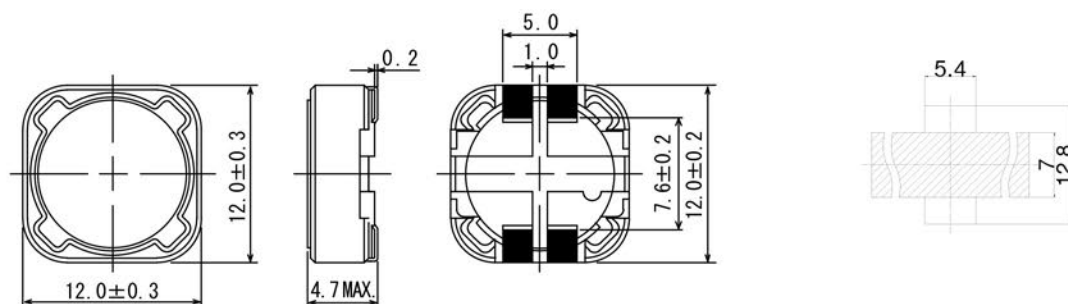

## Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (mΩ)	Rated Current(Max) 额定电流 (A)
PRH124-3 R9	3R9	3.9μH±30%	15	6.50
PRH124-4 R7	4R7	4.7μH±30%	18	5.70
PRH124-6 R8	6R8	6.8μH±30%	23	4.90
PRH124-8 R2	8R2	8.2μH±30%	26	4.60
PRH124-10 0	100	10μH±30%	28	4.50
PRH124-12 0	120	12μH±30%	38	4.00
PRH124-15 0	150	15μH±30%	50	3.20
PRH124-18 0	180	18μH±30%	57	3.10
PRH124-22 0	220	22μH±30%	66	2.90
PRH124-27 0	270	27μH±30%	80	2.80
PRH124-33 0	330	33μH±30%	97	2.70
PRH124-39 0	390	39μH±30%	132	2.10
PRH124-47 0	470	47μH±30%	150	1.90
PRH124-56 0	560	56μH±30%	190	1.80
PRH124-68 0	680	68μH±30%	220	1.50
PRH124-82 0	820	82μH±30%	260	1.30
PRH124-10 1	101	100μH±30%	308	1.20
PRH124-12 1	121	120μH±30%	380	1.10
PRH124-15 1	151	150μH±30%	530	0.95
PRH124-18 1	181	180μH±30%	620	0.85
PRH124-22 1	221	220μH±30%	700	0.80
PRH124-27 1	271	270μH±30%	870	0.60
PRH124-33 1	331	330μH±30%	990	0.50

\* SPQ:500PCS/REEL