

PRH125



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

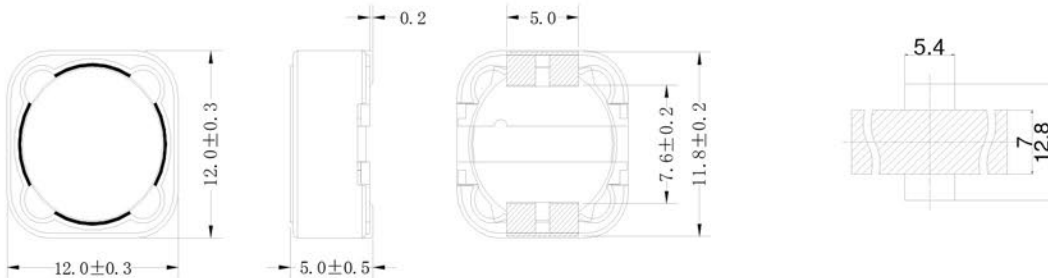

Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (mΩ)	Rated Current(Max) 额定电流 (A)
PRH125-1 R3	1R3	1.3μH±30%	12(9)	8.00
PRH125-2 R1	2R1	2.1μH±30%	14(11)	7.00
PRH125-3 R3	3R3	3.3μH±30%	18(14)	6.50
PRH125-4 R4	4R4	4.4μH±30%	20(16)	5.00
PRH125-5 R8	5R8	5.8μH±30%	21(17)	4.40
PRH125-7 R5	7R5	7.5μH±30%	24(19)	4.20
PRH125-10 0	100	10μH±30%	25(19)	4.00
PRH125-12 0	120	12μH±30%	27(21)	3.50
PRH125-15 0	150	15μH±30%	30(23)	3.30
PRH125-18 0	180	18μH±30%	34(26)	3.00
PRH125-22 0	220	22μH±30%	36(39)	2.80
PRH125-27 0	270	27μH±30%	57(44)	2.30
PRH125-33 0	330	33μH±30%	68(52)	2.10
PRH125-39 0	390	39μH±30%	75(58)	2.00
PRH125-47 0	470	47μH±30%	110(84)	1.80
PRH125-56 0	560	56μH±30%	120(93)	1.70
PRH125-68 0	680	68μH±30%	140(110)	1.50
PRH125-82 0	820	82μH±30%	160(120)	1.40
PRH125-10 1	101	100μH±30%	170(130)	1.30
PRH125-12 1	121	120μH±30%	230(180)	1.10
PRH125-15 1	151	150μH±30%	290(220)	1.00
PRH125-18 1	181	180μH±30%	400(310)	0.90
PRH125-22 1	221	220μH±30%	460(350)	0.80
PRH125-27 1	271	270μH±30%	510(390)	0.75
PRH125-33 1	331	330μH±30%	690(530)	0.68
PRH125-39 1	391	390μH±30%	770(590)	0.65
PRH125-47 1	471	470μH±30%	860(660)	0.58
PRH125-56 1	561	560μH±30%	1200(920)	0.54
PRH125-68 1	681	680μH±30%	1340(1030)	0.48
PRH125-82 1	821	820μH±30%	1530(1180)	0.4

* SPQ:500PCS/REEL

The sample parameters are based on actual measured values