


PRH3D11



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

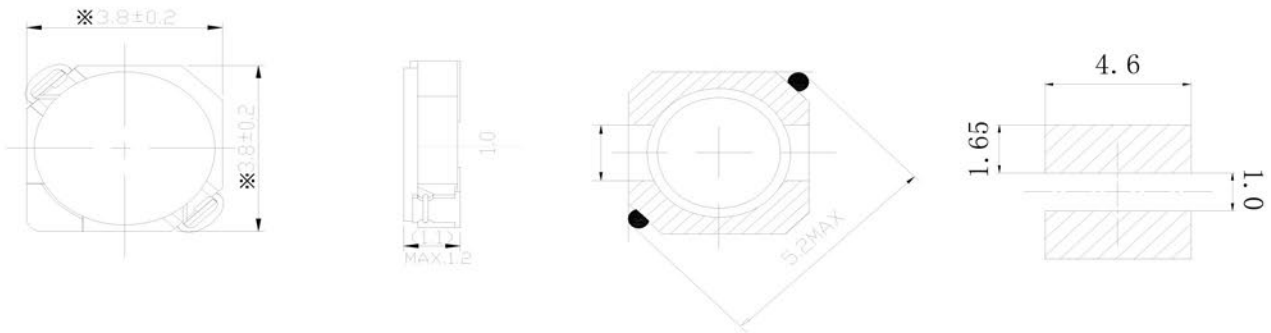

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻(毫歐)	Rated Current(Max) 額定電流(A)
PRH3D1 1-2R7	2R7	2.7 μ H \pm 25%	78(60)	0.53
PRH3D1 1-3R3	3R3	3.3 μ H \pm 25%	118(86)	0.68
PRH3D1 1-4R7	4R7	4.7 μ H \pm 25%	123(95)	0.40
PRH3D1 1-6R7	6R7	6.7 μ H \pm 25%	343(264)	1.0
PRH3D1 1-6R8	6R8	6.8 μ H \pm 25%	180(150)	0.34
PRH3D1 1-8R2	8R2	8.2 μ H \pm 25%	204(170)	0.32
PRH3D1 1-100	100	10 μ H \pm 25%	240(220)	0.28
PRH3D1 1-120	120	12 μ H \pm 25%	276(230)	0.25
PRH3D1 1-150	150	15 μ H \pm 25%	372(310)	0.23
PRH3D1 1-180	180	18 μ H \pm 25%	468(390)	0.21
PRH3D1 1-220	220	22 μ H \pm 25%	540(450)	0.19
PRH3D1 1-270	270	27 μ H \pm 25%	726(605)	0.17
PRH3D1 1-330	330	33 μ H \pm 25%	822(685)	0.15
PRH3D1 1-390	390	39 μ H \pm 25%	942(785)	0.14
PRH3D1 1-101	101	100 μ H \pm 25%	3200(2444)	0.12

* SPQ:3000PCS/REEL