


PRH3D14A



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

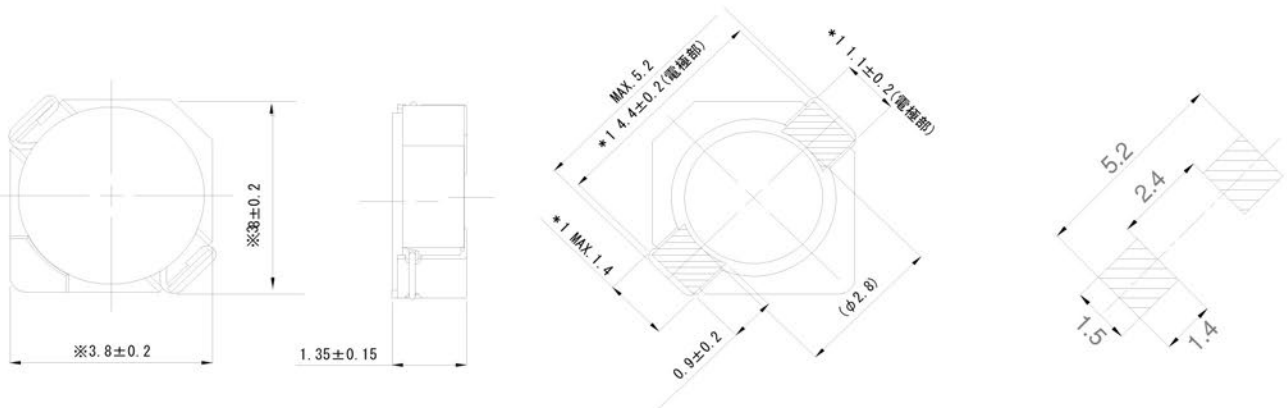

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (毫歐)	Rated Current(Max) 額定電流 (A)
PRH3D1 4A-1R2	1R2	1.2 μ H \pm 30%	45(36)	2.15
PRH3D1 4A-1R7	1R7	1.7 μ H \pm 30%	63(50)	1.85
PRH3D1 4A-2R2	2R2	2.2 μ H \pm 30%	69(65)	1.60
PRH3D1 4A-2R7	2R7	2.7 μ H \pm 30%	88(70))	1.45
PRH3D1 4A-3R3	3R3	3.3 μ H \pm 30%	100(80)	1.35
PRH3D1 4A-3R9	3R9	3.9 μ H \pm 30%	135(110))	1.15
PRH3D1 4A-4R7	4R7	4.7 μ H \pm 30%	150(120)	1.10
PRH3D1 4A-8R2	8R2	8.2 μ H \pm 30%	238(190)	0.82
PRH3D1 4A-100	100	10 μ H \pm 30%	262(210)	0.75
PRH3D1 4A-120	120	12 μ H \pm 30%	350(280)	0.67
PRH3D1 4A-150	150	15 μ H \pm 30%	488(390)	0.60
PRH3D1 4A-220	220	22 μ H \pm 30%	575(460)	0.52

* SPQ:3000PCS/REEL