


PRH3D14AHP



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

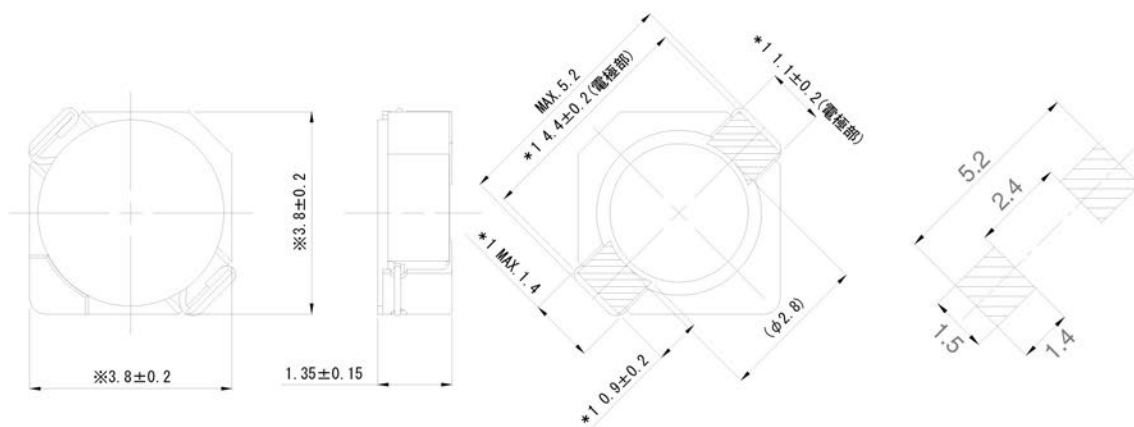

Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (毫欧)	Rated Current(Max) 额定电流 (A)
PRH3D1 4AHP-1R5	1R5	1.5μH±30%	76(61)	2.60
PRH3D1 4AHP-2R4	2R4	2.4μH±30%	129(103)	2.00
PRH3D1 4AHP-3R2	3R2	3.2μH±30%	139(111)	1.80
PRH3D1 4AHP-4R7	4R7	4.7μH±30%	214(171)	1.45
PRH3D1 4AHP-6R8	6R8	6.8μH±30%	290(232)	1.20
PRH3D1 4AHP-100	100	10μH±30%	440(352))	1.00
PRH3D1 4AHP-150	150	15μH±30%	650(521))	0.80
PRH3D1 4AHP-220	220	22μH±30%	830(666))	0.65

* SPQ:3000PCS/REEL