


PRH3D16HP



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

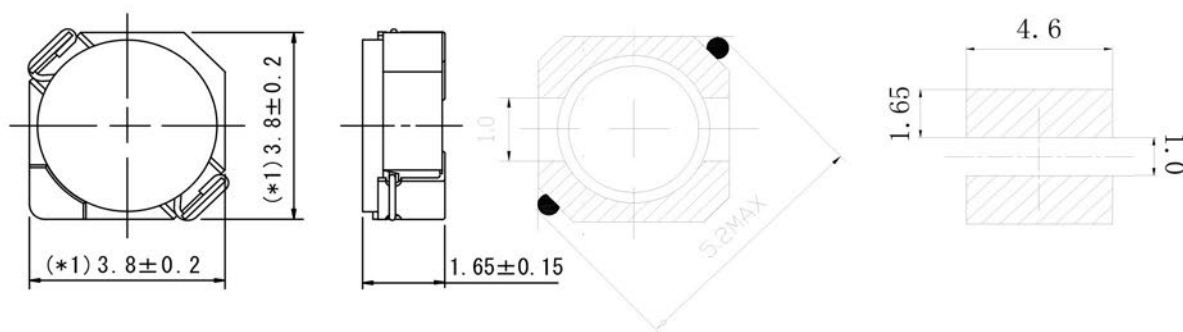

Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (mΩ)	Rated Current(Max) 额定电流 (A)
PRH3D1 6HP-1R7	1R7	1.7μH±30%	51(41)	2.00
PRH3D1 6HP-2R2	2R2	2.2μH±30%	59(47)	1.75
PRH3D1 6HP-3R3	3R3	3.3μH±30%	85(68)	1.40
PRH3D1 6HP-4R7	4R7	4.7μH±30%	116(93)	1.20
PRH3D1 6HP-6R8	6R8	6.8μH±30%	180(145)	1.00
PRH3D1 6HP-100	100	10μH±30%	230(185)	0.84
PRH3D1 6HP-150	150	15μH±30%	410(328)	0.65
PRH3D1 6HP-220	220	22μH±30%	610(488)	0.55
PRH3D1 6HP-330	330	33μH±30%	870(695)	0.46

* SPQ:3000PCS/REEL