

# PRH7D15



## FEATURES 特点

- \* Excellent solderability and high heat resistance  
良好的可焊性和高耐热性


## APPLICATION 用途

- \* DC / DC 转换器

## MEASURING FREQUENCY 测试频率

- \* 100KHz 0.3V

## Shapes And Dimensions 外形及尺寸示意图

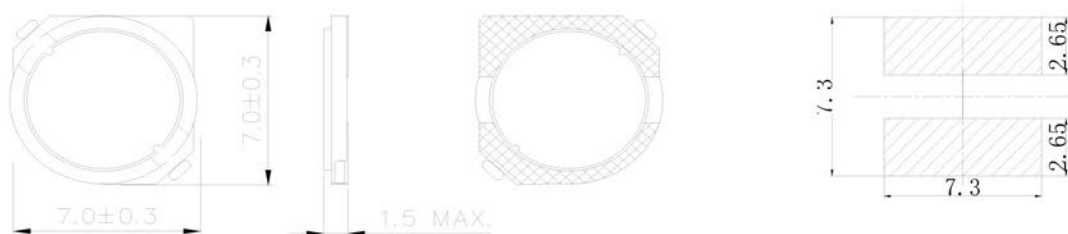

## Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (mΩ)	Rated Current(Max) 額定電流 (A)
PRH7D1 5-3R3	3R3	2.2μH±25%	67 ( 51)	2.7
PRH7D1 5-4R7	4R7	4.7μH±25%	90 ( 70)	2.2
PRH7D1 5-6R8	6R8	6.8μH±25%	137(106)	1.8
PRH7D1 5-100	100	10μH±25%	150(124)	1.6
PRH7D1 5-150	150	15μH±25%	296(228)	1.2
PRH7D1 5-220	220	22μH±25%	386(297)	1.0

\* SPQ:1500PCS/REEL