

PRH7D20



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

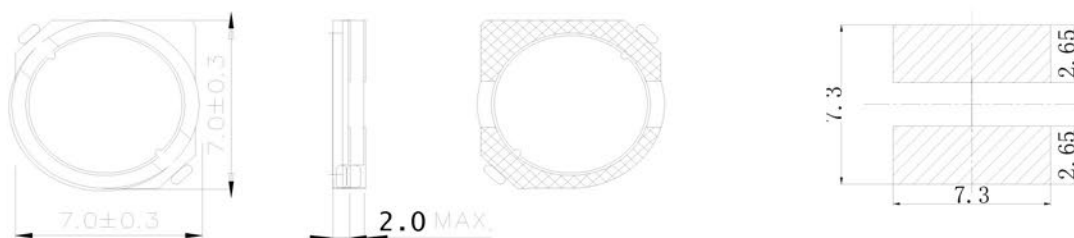

Electrical Characteristics 电气性能

Type 型号	Indicate 表示	Inductance 电感值	D.C.R(Max) 直流电阻 (mΩ)	Rated Current(Max) 额定电流 (A)
PRH7D2 0-2R2	2R2	2.2±25%	59	2.7
PRH7D2 0-3R3	3R3	3.3±25%	70(51.63m)	3.6
PRH7D2 0-4R7	4R7	4.7±25%	94(71.7m)	3.0
PRH7D2 0-5R6	5R6	5.6±25%	100	2.8
PRH7D2 0-6R8	6R8	6.8±25%	135(107m)	2.4
PRH7D2 0-8R0	8R0	8.0±25%	120	2.2
PRH7D2 0-100	100	10±25%	154(121.1m)	2.0
PRH7D2 0-120	120	12±25%	216	1.7
PRH7D2 0-150	150	15±25%	233	1.6
PRH7D2 0-180	180	18±25%	330	1.5
PRH7D2 0-220	220	22±25%	370	1.0

* SPQ:1500PCS/REEL